

DRAWING LIST	
DWG NO.	SHEET TITLE
E1.00	ELECTRICAL LEGEND AND NOTES
E2.00	ELECTRICAL SITE PLAN
E3.00	ENLARGED ELECTRICAL BUILDING PLANS
E4.00	ELECTRICAL SCHEDULES & POWER RISER DIAGRAM
E5.00	ELECTRICAL DETAILS

SCOPE

MULTI-PURPOSE BUILDING AND MAINTENANCE BUILDING AND ALL SYSTEMS WITHIN ARE DESIGNED AND INSTALLED BY OTHERS. COORDINATE WITH THE BUILDING MANUFACTURER FOR ELECTRICAL SERVICE PANEL INFORMATION AND LOCATION. ROUTE SITE LIGHTING, EV CHARGING STATION AND FOOD TRUCK ELECTRICAL PEDESTAL CONDUITS AND WIRING TO ELECTRICAL PANELS P1 AND P2 AND TERMINATE.

THE CONTRACTOR SHALL COORDINATE WITH THE BUILDING MANUFACTURER AND SUBMIT SERVICE APPLICATION TO PSE.

THE CONTRACTOR SHALL COORDINATE WITH THE BUILDING MANUFACTURER AND KPUD FOR COMMUNICATION SYSTEM REQUIREMENTS.

FIELD LIGHTING IS DESIGNED BY MUSCO LIGHTING. MUSCO SHALL PROVIDE ALL EQUIPMENT, MATERIAL AND INSTALLATION FOR COMPLETE OPERATION OF THE FIELD LIGHTING SYSTEM. THE CONTRACTOR AND BUILDING MANUFACTURER SHALL COORDINATE WITH MUSCO FOR ELECTRICAL NEEDS AND REQUIREMENTS.



ELECTRICAL LEGEND	
SYMBOL	DESCRIPTION
	LIGHTING/POWER CONTROL PANEL
	ELECTRICAL PANEL
	BRANCH CIRCUIT WIRING AND CONDUIT AS REQUIRED FOR CKTS DEVICES AND EQUIP INDICATED ON PLANS. (WIRING AND CONDUIT SIZE MAY NOT APPEAR ON PLANS). PROVIDE CONDUCTORS AND CONDUIT PER NEC CODE. #12 AWG, 3/4" C. MIN. EMT OR RIGID STEEL. ↓ INDICATES EQUIP GND. ↑ INDICATES ISOLATED GROUND.
	CONDUIT UNDER GROUND OR FLOOR
	BRANCH CIRCUIT HOME RUN 3/4" MIN.
	GROUNDING ELECTRODE PER CODE
	GROUND NEUTRAL BONDING JUMPER
	FUSED DISCONNECT
	VAULT PER DESCRIPTION
	DUPLEX RECEPTACLE
	DUPLEX RECEPTACLE GFCI TYPE
	SPECIAL PURPOSE RECEPTACLE
	TYPICAL LIGHT FIXTURE IDENTIFIERS: LXX - LIGHT FIXTURE TYPE, SEE LIGHT FIXTURE SCHEDULE. P-1 - PANEL AND CIRCUIT CALLOUT L# - LCP RELAY INDICATED BY L# WHERE # INDICATES NUMBER. SEE LCP SCHEDULE
	SPORT LIGHT POLE. MULTI-HEAD.
	PARKING LIGHT POLE WITH SINGLE HEAD. LUMINAIRES MOUNTED AT 30'
	PARKING LIGHT POLE WITH DOUBLE HEAD. LUMINAIRES MOUNTED AT 30'

APPLICABLE CODES

- 2021 INTERNATIONAL BUILDING CODE
- 2021 WASHINGTON STATE ENERGY CODE
- 2021 INTERNATIONAL FIRE CODE
- 2023 NATIONAL ELECTRICAL CODE (NEC)
- WASHINGTON STATE ADMINISTRATIVE CODE (WAC)

GENERAL REQUIREMENTS

1. PROVIDE COMPLETE WORK FOR REQUIREMENTS AS DESCRIBED ON THIS PAGE.
2. INSTALLATION SHALL COMPLY WITH APPLICABLE CODES, INCLUDING, BUT NOT LIMITED TO THE FOLLOWING: 2023 NATIONAL ELECTRICAL CODE (NEC), WASHINGTON STATE ADMINISTRATIVE CODE (WAC), AND 2021 WASHINGTON NON-RESIDENTIAL ENERGY CODE (NREC).
3. PROVIDE ALL MATERIAL AND LABOR RELATED TO THE INSTALLATION OF ELECTRICAL DEVICES AND CONDUIT ROUTING UNDERGROUND.
4. DO NOT TAKE MEASUREMENTS FROM PLANS FOR DEVICE LOCATIONS. FIELD VERIFY EXACT DEVICE, EQUIPMENT LOCATIONS, AND MOUNTING HEIGHTS WITH OWNER'S REPRESENTATIVE FOR PROPER INSTALLATION.
5. RACEWAYS, WIRE SIZES AND CIRCUITS AS SHOWN REPRESENT INTENT OF INSTALLATION, BUT MAY NOT NECESSARILY REPRESENT THE COMPLETE WIRING COUNTS AND MINIMUM SIZES FOR CONNECTING THE CIRCUITS SHOWN. CONTRACTOR SHALL INCLUDE IN THE BID, ALL REQUIRED RACEWAY SIZES AND NUMBER OF CONDUCTORS IN ORDER TO PROVIDE ALL CIRCUITS SHOWN.
6. INCLUDE COST OF PROVIDING ALL ELECTRICAL CONNECTIONS AS REQUIRED FOR FULL OPERATION OF ALL OWNER FURNISHED, CONTRACTOR INSTALLED EQUIPMENT.
7. VERIFY ALL LIGHT FIXTURE TYPES, VOLTAGE, AND MOUNTING METHODS TO SUIT SUPPORTING SURFACES. ALL FIXTURE MOUNTING HEIGHTS SHALL BE APPROVED OR AS DIRECTED BY THE OWNER'S REPRESENTATIVE. VERIFY CORRECT CATALOG NUMBERS PRIOR TO ORDERING OF FIXTURES. ALL SUBSTITUTE LIGHT FIXTURES MUST BE SUBMITTED FOR APPROVAL PRIOR TO BID. APPROVED SUBSTITUTES WILL BE IDENTIFIED IN AN ADDENDUM. PROVIDE ONLY THE APPROVED SUBSTITUTE FIXTURES OR THE FIXTURES AS SPECIFIED. LIGHT FIXTURES WITHOUT PRIOR APPROVALS WILL NOT BE ALLOWED FOR SUBSTITUTION AFTER BIDS.
8. LABEL ALL EQUIPMENT, J-BOXES, RACEWAY WITH SERVING PANEL NAME AND CIRCUIT NUMBER(S).
9. INSTALLATION OF UNDERGROUND WIRING SYSTEMS SHALL INCLUDE EXCAVATION, CUTTING, PATCHING, BACKFILL, AND COMPACTION. DO NOT CUT OR DAMAGE ANY EXISTING UTILITIES, STRUCTURAL MEMBERS, OR BUILDING FOUNDATIONS. VERIFY EXISTING CONDITIONS PRIOR TO EXCAVATION WORK. INCLUDE COST FOR UNDERGROUND LOCATOR SERVICE TO IDENTIFY LOCATIONS OF EXISTING COMPONENTS. HAND EXCAVATE IN LOCATIONS WHERE EXISTING UNDERGROUND COMPONENTS ARE SUBJECT TO DAMAGE. REPAIR DAMAGE TO EXISTING UTILITIES OR BUILDING STRUCTURE TO OWNER'S SATISFACTION AT THE CONTRACTORS EXPENSE.
10. RACEWAY ROUTING IS SCHEMATIC AND DOES NOT SHOW EXACT PHYSICAL ARRANGEMENT OF EQUIPMENT. WHERE INDICATED ON DRAWINGS, JUNCTION BOXES AND PULLBOXES ARE MINIMUM REQUIREMENTS. PROVIDE FITTINGS AND PULLBOXES OF ADEQUATE SIZE IN RACEWAY SYSTEMS WHEREVER NECESSARY OR REQUIRED BY THE NEC OR LOCAL CODES. PROVIDE EXPANSION JOINT FITTINGS FOR RACEWAY PASSING THROUGH NEW OR EXISTING EXPANSION JOINTS INSTALLED BETWEEN BUILDINGS. VERIFY EXACT LOCATIONS AND DETAILS OF EXPANSION JOINTS PRIOR TO WORK. COORDINATE ALL RACEWAY ROUTING, PULLBOXES, AND EQUIPMENT LOCATIONS WITH OTHER TRADES TO AVOID CONFLICTS OF EQUIPMENT INSTALLATIONS.
11. PROVIDE PULL-WIRES IN ALL EMPTY CONDUITS.
12. PRIOR TO PREPARATION OF BID, VISIT JOBSITE AND EXAMINE EXISTING CONDITION.

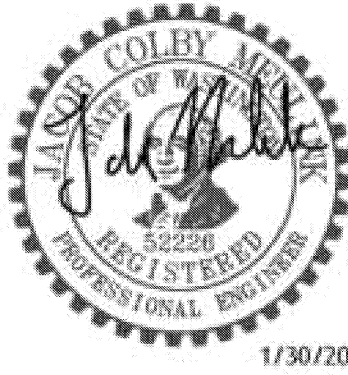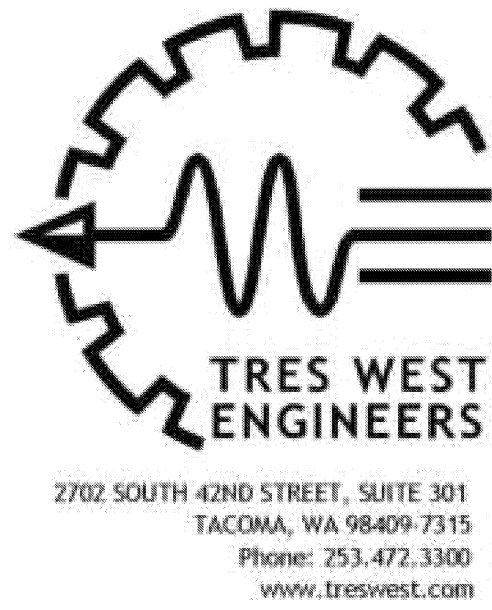

Project Title
POULSBO EVENT AND RECREATION CENTER PHASE 1
HW RELIANCE ST
POULSBO, WA 98370

Project Number
241002

Issue & Revision Dates

Bid Set: 1/30/2026
Draft Bid Set: 1/16/2026
Building Permit: 12/18/2025
SPR Revision: 9/12/2025

BID SET



Sheet Title
ELECTRICAL LEGEND AND NOTES

LIGHT FIXTURE SCHEDULE															
ID TAG	DESCRIPTION	** MANUFACTURER		MOUNTING	LIGHT SOURCE				BUG RATING	DRIVER	DIMMING	VOLTS	INPUT VA	EFFICACY	NOTES
		NAME	CATALOG NUMBER		TYPE	° / LUMENS	CCT	CRI							
EB1	SURFACE MOUNT VANDAL RESISTANT LINEAR, WET LOCATION	LUMINAIRE LED	VPF8 4FT MIN10 25W 30K MVOLT OP BLK	SURFACE	LED	DL 2,697	3000K	82		0-10V	YES	UNV	25	108	1
ES1	PARKING AREA - DOUBLE HEAD (2@180), 30FT POLE	NLS LIGHTING	TRC-2 T4 32L 7 30K7 UNV D-180 BLK FSP221-40 SF CFL	POLE	LED	DL 8,819	3000K	70	2-0-2	0-10V	YES	UNV	104	118	1
ES2	PEDESTRIAN SCALE - DOUBLE HEAD (2@180), 12FT POLE	NLS LIGHTING	TRC-1 T4 16L 7 30K7 UNV D-180 BLK FSP221-20 12	POLE	LED	DL 8,818	3000K	70	1-0-1	0-10V	YES	UNV	72	125	1
ES3	PEDESTRIAN SCALE - SINGLE HEAD, 12FT POLE	NLS LIGHTING	TRC-1 T4 16L 7 30K7 UNV SGL BLK FSP221-20 12	POLE	LED	DL 4,909	3000K	70	1-0-1	0-10V	YES	UNV	36	125	1
ES4	PEDESTRIAN SCALE - SINGLE HEAD, 12FT POLE (PATHWAY)	NLS LIGHTING	TRC-1 T2 16L 40 30K7 UNV SGL BLK FSP221-20 12	POLE	LED	DL 2,679	3000K	70	1-0-1	0-10V	NO	UNV	21	131	1
ES5	LIGHTS MOUNTED TO SAIL POSTS AT PLAYGROUND (UPLIGHT/DOWNLIGHT)	LITHONIA LIGHTING	OLLWU LED P1 40K MVOLT DDB	POLE	LED	DL 947	3000K	70		0-10V	NO	UNV	14	68	1
P1-P5	PICKLE BALL COURTS	MUSCO LIGHTING													2
P6-P7	MULTHUSE SPORT COURT	MUSCO LIGHTING													2
S1-S8	SOCCER FIELDS	MUSCO LIGHTING													2
NOTES: * DL = DELIVERED LUMENS, IL = INITIAL LUMENS ** ALTERNATE MANUFACTURER MUST MEET DESIGN INTENT OF THE PROJECT INCLUDING MINIMUM LIGHT LEVELS. (REFER TO DIVISION 01 FOR SUBSTITUTIONS) 1. COORDINATE FINISH COLORS WITH ENGINEER. 2. LIGHTING AND WEATHERPROOF GFCI 120V, 20A RECEPTACLE WITH LOCKING COVERS PROVIDED BY MUSCO. RECEPTACLES MOUNTED NEAR BASE OF POLE +18" AFG. SEE MUSCO SUBMITTAL FOR ADDITIONAL INFORMATION.															

LCP	LIGHTING CONTROL PANEL - LCP						LOCATION: MULTI-PURPOSE BUILDING
	NOTES:						PANEL TYPE: MAIN MOUNTING: SURFACE
RELAY #	PANEL/ CIRCUIT #	LOAD LOCATION	LOCAL OVERRIDE SWITCH CONTROLLED	USER DIMMING	UL924	RELAY CONTROLLED (ON/OFF) VIA TIMECLOCK	DESCRIPTION / NOTES
L1	P2-1	PARKING LOT & PATHWAY	YES	NO	NO	YES	FIXTURES TO TURN ON AND OFF AT OWNER SPECIFIED SCHEDULE COORDINATE WITH OWNER PRIOR TO PROGRAMMING.
L2	P2-2	PLAYGROUND	YES	NO	NO	YES	FIXTURES TO TURN ON AND OFF AT OWNER SPECIFIED SCHEDULE COORDINATE WITH OWNER PRIOR TO PROGRAMMING.
L3	P2-3	SHELTER 1	YES	NO	NO	YES	FIXTURES TO TURN ON AND OFF AT OWNER SPECIFIED SCHEDULE COORDINATE WITH OWNER PRIOR TO PROGRAMMING.
L4	P2-4	SHELTER 2	YES	NO	NO	YES	FIXTURES TO TURN ON AND OFF AT OWNER SPECIFIED SCHEDULE COORDINATE WITH OWNER PRIOR TO PROGRAMMING.
L5	P2-25	SHELTER 3	YES	NO	NO	YES	FIXTURES TO TURN ON AND OFF AT OWNER SPECIFIED SCHEDULE COORDINATE WITH OWNER PRIOR TO PROGRAMMING.
L6	SPARE						
L7	SPARE						
L8	SPARE						

KEYPLAN

THIS DRAWING WAS PRODUCED FROM ORIGINAL AS-BUILT DRAWINGS AND FIELD OBSERVATIONS, AND MAY NOT REPRESENT AN ACCURATE AS-BUILT CONDITION. DISCREPANCIES MAY BE ENCOUNTERED, AND IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY ALL CONDITIONS.

Drawn By: DPH
Checked By: DPH

Sheet Number

E1.00

Sheet Number: 79 of 83
All material herein constitutes the original and unpublished work of Tres West Engineers and may not be used, duplicated or disclosed without the written consent of the Tres West. Copyright © 2025 by Tres West Engineers, Inc. All rights reserved.