

ARCHITECT

VLK
20445 State Hwy 249, Suite 350
Houston, Texas 77070
Main Phone: 281.671.2300
www.vlkarhitects.com

M.E.P. ENGINEER

Salas O'Brien
10930 W. Sam Houston Pkwy N, Ste. 900
Houston, Texas 77064
Main Phone: 281.664.1900
www.salasobrien.com

ELECTRICAL GENERAL NOTES

- 1 REMOVE ALL ABANDONED EQUIPMENT, WIRING AND CONDUIT.
- 2 DISCONNECT AND REMOVE ALL CONDUIT AND WIRE ASSOCIATED WITH HVAC EQUIPMENT BEING REMOVED.
- 5 THE LOCATIONS OF EXISTING CIRCUITS AND EQUIPMENT ARE SHOWN IN AN APPROXIMATE WAY ONLY & HAVE NOT BEEN INDEPENDENTLY VERIFIED BY THE OWNER OR ITS REPRESENTATIVE. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL EXISTING ELECTRICAL DEVICES, EQUIPMENT & WIRING BEFORE COMMENCING WORK & AGREES TO BE FULLY RESPONSIBLE FOR ANY AND ALL DAMAGES WHICH MIGHT BE OCCASIONED BY THE CONTRACTORS FAILURE TO EXACTLY LOCATE AND PRESERVE ANY AND ALL EXISTING PORTIONS OF THE ELECTRICAL SYSTEM.
- 6 THE CONTRACTOR SHALL REMOVE SUCH EXISTING WORK AS CALLED FOR ON THE DRAWINGS OR AS REQUIRED TO CLEAR THE AREAS OF NEW CONSTRUCTION.
- 7 ALL EQUIPMENT REMOVED THAT IS NOT BEING REUSED SHALL REMAIN THE PROPERTY OF THE OWNER AND SHALL BE STORED OR DISPOSED OF AS DIRECTED.
- 8 EXCEPT AS OTHERWISE NOTED, ALL EXISTING ELECTRICAL WORK WHICH WILL NOT BE RENDERED OBSOLETE & WHICH MAY BE DISTURBED DUE TO ANY CHANGES REQUIRED UNDER THIS CONTRACT, SHALL BE RESTORED TO ITS ORIGINAL OPERATING CONDITION. OTHER ELECTRICAL WORK OR MATERIAL RENDERED OBSOLETE SHALL BE ABANDONED WHERE CONCEALED AND REMOVED WHERE EXPOSED. OLD UNUSED WIRING AND DEVICES SHALL BE REMOVED FROM THE ABANDONED (CONCEALED) CONDUITS. OUTLETS SHALL BE PROVIDED WITH BLANK COVERS. ANY CONDUITS OUT OF MASONRY SURFACE SHALL BE CUT INTO SURFACE AND PATCHED.
- 9 WHERE EXISTING ELECTRICAL WORK INTERFERES WITH NEW WORK AND WHERE SUCH INSTALLATIONS ARE TO REMAIN IN USE, THE INSTALLATIONS SHALL BE DISCONTINUED AND/OR RECONNECTED TO COORDINATE WITH THE WORK INDICATED ON THE CONTRACT DRAWINGS AND AS SPECIFIED.
- 10 WHERE EXISTING RACEWAYS THAT ARE NOT TO BE REUSED INTERFERE WITH NEW WORK, THESE RACEWAYS SHALL BE REMOVED BACK TO THE NEAREST JUNCTION BOX OR PULL BOX AND THE OPENINGS COVERED.
- 11 EXISTING RACEWAYS AND/OR WIRING MAY BE REUSED WHERE PRACTICABLE. EXCEPT AS OTHERWISE INDICATED.
- 12 CONTRACTOR SHALL MAINTAIN CONTINUITY OF BRANCH CIRCUITS SERVING MULTIPLE ITEMS OF WHICH ONE OR MORE ARE BEING DEMOLISHED. CONDUCTORS AND CONDUITS FOR THOSE ITEMS BEING DEMOLISHED SHALL BE REMOVED AS FAR AS PRACTICABLE.
- 13 IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO REMOVE ALL EXISTING ELECTRICAL EQUIPMENT NOT REQUIRED OR NOT NECESSARY FOR THE COMPLETION OF THIS PROJECT.
- 14 IF ANY BRANCH CIRCUIT WIRING FEEDING EQUIPMENT TO REMAIN IN PLACE FOR REUSE IS DAMAGED DURING CONSTRUCTION, THE CONTRACTOR SHALL REPLACE WITH NEW BRANCH CIRCUIT WIRING OF THE SAME SIZE AND TYPE, AS EXISTING AT NO COST TO THE OWNER.

CONTRACTOR SCHEDULE

CONTRACTOR TAG	CIRCUIT NUMBER	CONTROL SOURCE	CONTRACTOR LOCATION	LOAD(S) SERVED	120 V CONTROL CIRCUIT
CMS1	BL149.51	BMCS	ADJACENT TO PANEL 'BL1'	MARQUEE SIGN	(E)CONTRACTOR CONTROL CIRCUIT

1. CONTRACTOR TO COORDINATE EXACT PROGRAMING OF TIME-SCHEDULE WITH OWNER REPRESENTATIVE.

LIGHTING CONTROL SCHEDULE

Type	Sensor Operation	# of Lighting Zones	# of Plug Load Zones	# of Total Zones	Description
ER	-	-	-	-	LISTED UL924 EMERGENCY LOAD CONTROL RELAY, PLENUM RATED, 0-10V COMPATIBLE, 16A MINIMUM
RA	NONE	1	-	1	MEPT, ON/OFF SPRING WOUND MECHANICAL TIME SWITCH, 20 AMP, 12-HOUR WITH HOLD. WHERE MULTIPLE SWITCHES ARE USED, THESE SHALL BE LINKED TOGETHER FOR SIMULTANEOUS OPERATION WITHIN THE SPACE.
RB	VACANCY - MANUAL ON / AUTO OFF 20 MINUTES TIMEOUT	1	-	1	ON/OFF SWITCH; NO DIMMING.

1 PER IECC-2015, SECTION C605, AREAS/ ROOMS WHERE AUTOMATIC SHUTOFF FOR LIGHTING WOULD ENDANGER OCCUPANT SAFETY ARE EXEMPT FROM AUTOMATIC CONTROLS.
2 PROVIDE PHOTOCELL WITHIN DAYLIGHT ZONE ONLY WHERE SHOWN ON FLOORPLANS. IF SHOWN, A DAYLIGHT ZONE SHALL BE ADDED TO THE TOTAL NUMBER OF ZONES ON LIGHTING CONTROLS SCHEDULE.
4 CONTRACTOR TO COORDINATE EXACT PROGRAMING OF TIME-SCHEDULE WITH OWNER REPRESENTATIVE.

SITE LIGHTING FIXTURE SCHEDULE


Type Mark	MANUFACTURER	CATALOG NUMBER	MODEL	MOUNTING	LAMP TYPE	CCT	CRI	VOLTAGE	LOAD	REMARKS
EPA	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-2-UNV-XX / PTFX-1-90-XX		EXISTING POLE 1 @ 90	22.647 LUMENS LED	4000 K	80	277	183 W	TYPE I LED AREA LUMINAIRE ON EXISTING POLE. BUG RATING B3-UJ-G3. DLC CERTIFIED. PROVIDE ALL ACCESSORIES FOR MOUNTING ON EXISTING POLE WITH TENON.
EPB	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-3-UNV-XX / HIS-48-H / PTFX-1-90-XX		EXISTING POLE 1 @ 90	22.156 LUMENS LED	4000 K	80	277	183 W	TYPE II WITH BACKLIGHT CONTROL. LED AREA LUMINAIRE ON EXISTING POLE. BUG RATING B1-UJ-G3. DLC CERTIFIED. PROVIDE ALL ACCESSORIES FOR MOUNTING ON EXISTING POLE WITH TENON.
EPC	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-5W-UNV-XX / PTFX-1-90-XX		EXISTING POLE 1 @ 90	23.040 LUMENS LED	4000 K	80	277	183 W	TYPE V LED AREA LUMINAIRE ON EXISTING POLE. BUG RATING B6-UJ-G3. DLC CERTIFIED. PROVIDE ALL ACCESSORIES FOR MOUNTING ON EXISTING POLE WITH TENON.
EPD	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-5W-UNV-XX / PTFX-2-180-XX		EXISTING POLE 2 @ 180	23.040 LUMENS LED	4000 K	80	277	366 W	TYPE V LED AREA LUMINAIRE ON EXISTING POLE. BUG RATING B6-UJ-G3. DLC CERTIFIED. PROVIDE ALL ACCESSORIES FOR MOUNTING ON EXISTING POLE WITH TENON.
EPE	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-2-UNV-XX		EXISTING POLE 1 @ 90	22.647 LUMENS LED	4000 K	80	277	183 W	TYPE I LED AREA LUMINAIRE ON EXISTING POLE. BUG RATING B3-UJ-G3. DLC CERTIFIED. PROVIDE ALL ACCESSORIES FOR MOUNTING ON EXISTING POLE.
EPF	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-3-UNV-XX		EXISTING POLE 2 @ 180	22.156 LUMENS LED	4000 K	80	277	366 W	TYPE II LED AREA LUMINAIRE ON EXISTING POLE. BUG RATING B3-UJ-G4. DLC CERTIFIED. PROVIDE ALL ACCESSORIES FOR MOUNTING ON EXISTING POLE.
EPG	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-5W-UNV-XX		EXISTING POLE 1 @ 90	23.040 LUMENS LED	4000 K	80	277	183 W	TYPE V LED AREA LUMINAIRE ON EXISTING POLE. BUG RATING B3-UJ-G4. DLC CERTIFIED. PROVIDE ALL ACCESSORIES FOR MOUNTING ON EXISTING POLE.
NPA	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-3-UNV-XX / HIS-48-H		NEW POLE 1 @ 90	22.156 LUMENS LED	4000 K	80	277	183 W	TYPE II WITH BACKLIGHT CONTROL. BUG RATING B1-UJ-G3. MOUNT ON 3/4" EIGHT POWDER COAT OVER GALVANIZING POLE. DLC CERTIFIED.
NPB	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-3-UNV-XX / RTSP-307.0-1-KXX-DM10-BC		NEW POLE 2 @ 180	22.156 LUMENS LED	4000 K	80	277	366 W	TYPE II LED AREA LUMINAIRE. BUG RATING B3-UJ-G4. MOUNT ON 3/4" EIGHT POWDER COAT OVER GALVANIZING POLE. DLC CERTIFIED.
NPC	GARDCO	ECF-S-48L-1.2A-NW-G2-AR-5W-UNV-XX / RTSP-307.0-1-KXX-DM2-180-BC		NEW POLE 2 @ 180	23.040 LUMENS LED	4000 K	80	277	366 W	TYPE V LED AREA LUMINAIRE. BUG RATING B5-UJ-G3. MOUNT ON 3/4" EIGHT POWDER COAT OVER GALVANIZING POLE. DLC CERTIFIED.

1 UNLESS OTHERWISE INDICATED ON THE SCHEDULE ABOVE, THE ARCHITECT/OWNER REPRESENTATIVE SHALL SELECT ALL FINISHES, COLORS, AND TRIMS.
2 LIGHTING FIXTURE CATALOG NUMBERS AND DESCRIPTIONS ARE SCHEDULED FOR ESTABLISHING QUALITY, APPEARANCE AND PERFORMANCE OF THE FIXTURES AS REQUIRED BY THE DESIGN. EXACT CATALOG NUMBERS DESCRIBING MOUNTING CONDITIONS, FINISHES AND REQUIREMENTS RELATED TO TRIMS AND LENS FOR ALL FIXTURES SHALL BE CONFIRMED BY THE CONTRACTOR WITH THE ROOM FINISH SCHEDULE AND REFLECTED CEILING PLANS, INCLUDING GRID TYPES, ON THE ARCHITECTURAL DRAWINGS PRIOR TO BIDDING. FIXTURES SHALL BE SUBMITTED ACCORDING TO THE CONDITIONS INDICATED ON THE ARCHITECTURAL PLANS. REFER TO THE WRITTEN SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
3 REFER TO THE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS NOT INDICATED IN THE LIGHTING FIXTURE SCHEDULE. WHERE THERE IS AN INCONSISTENCY BETWEEN THE LIGHTING FIXTURE SCHEDULE AND THE SPECIFICATIONS, THE GREATER QUANTITY OR HIGHER QUALITY OF WORK SHALL BE INCLUDED IN THE PROPOSAL.
4 THE LIGHT FIXTURES SCHEDULED ARE THE BASIS OF DESIGN. IT IS NOT INTENDED TO LIMIT COMPETITION FROM EQUAL MANUFACTURERS. ALL BIDDERS SHALL SUBMIT THEIR PROPOSED LIGHT FIXTURES IN SUBMITTAL FORM A MINIMUM OF 10 BUSINESS DAYS PRIOR TO BID DATE FOR REVIEW. APPROVED LIGHT FIXTURES WILL BE ISSUED IN AN ADDENDUM.
5 THE CONTRACTOR SHALL PROVIDE ALL HARDWARE AND ACCESSORIES AS REQUIRED TO INSTALL FIXTURES IN LOCATIONS AS ILLUSTRATED WITH MOUNTING METHODS DESIRED.
6 WHEN A UNIVERSAL (120-277V) VOLTAGE OPTION IS AVAILABLE, IT SHALL BE PROVIDED. OTHERWISE PROVIDE AS INDICATED IN SCHEDULE.
7 FOR ALL SUSPENDED FIXTURES, COORDINATE THE EXACT MOUNTING ELEVATION ABOVE FINISHED FLOOR WITH ARCHITECT PRIOR TO INSTALLATION. PROVIDE SUSPENSION HARDWARE IN LENGTHS AS REQUIRED.


LIGHTING FIXTURE SCHEDULE

Type Mark	MANUFACTURER	CATALOG NUMBER	MODEL	MOUNTING	LAMP TYPE	CCT	CRI	VOLTAGE	LOAD	REMARKS
C1	DAY-STRITE	FSS-4-40L-840-UNV-DM1 / FSSWG4		4077 SURFACE / THREADED ROD	4077 LUMENS LED	4000 K	80	277	30 W	LED 4-FEET STRIP. OPAL ACRYLIC LENS. 0-10V DIMMING DRIVER. DLC CERTIFIED. PROVIDE WITH WIREGUARD.
W1	GARDCO	GWM-A08-740-73M-UNV-XX		WALL	4,716 LUMENS LED	4000 K	80	277	30 W	LED ARCHITECTURAL WALLPACK. ALUMINUM BODY. FULL CUT-OFF. WET LOCATION RATED. DLC CERTIFIED.
W2	GARDCO	GWM-A06-740-73M-UNV-XX		WALL	2,868 LUMENS LED	4000 K	80	277	16 W	LED ARCHITECTURAL WALLPACK. ALUMINUM BODY. FULL CUT-OFF. WET LOCATION RATED. DLC CERTIFIED.
W3	KENALL	MR17FL-PP-XX-15L40K-DV		SURFACE	2,125 LUMENS LED	4000 K	80	277	15 W	LED ARCHITECTURAL 15-INCH ROUND FIXTURE, ALUMINUM BODY.
W4	KENALL	MR13FL-PP-XX-20L40K-DV		SURFACE	2,250 LUMENS LED	4000 K	80	277	20 W	LED ARCHITECTURAL 13-INCH ROUND FIXTURE, ALUMINUM BODY.
WC4	AXIS	EX4S-400-80-40-SO-4-XX-UNV-DP-1-SB / EF		SURFACE / AVADEK	400 LIFT LED	4000 K	80	277	20 W	4-INCH x 4-FEET LINEAR LED IN EXTRUDED ALUMINUM PROFILE WITH OPAL ACRYLIC LENS AND END FEED CONNECTION. WET LOCATION RATED. 0-10V DIMMING DRIVER. DLC CERTIFIED. PROVIDE SURFACE MOUNTING BRACKETS AND TIGHT SEAL ALL CANOPY PENETRATIONS.
WO1	KENALL	MS19FL-PP-XX-15L40K-DV		SURFACE	2,222 LUMENS LED	4000 K	80	277	15 W	LED ARCHITECTURAL 15-INCH SQUARE FIXTURE, ALUMINUM BODY.


1 UNLESS OTHERWISE INDICATED ON THE SCHEDULE ABOVE, THE ARCHITECT/OWNER REPRESENTATIVE SHALL SELECT ALL FINISHES, COLORS, AND TRIMS.
2 LIGHTING FIXTURE CATALOG NUMBERS AND DESCRIPTIONS ARE SCHEDULED FOR ESTABLISHING QUALITY, APPEARANCE AND PERFORMANCE OF THE FIXTURES AS REQUIRED BY THE DESIGN. EXACT CATALOG NUMBERS DESCRIBING MOUNTING CONDITIONS, FINISHES AND REQUIREMENTS RELATED TO TRIMS AND LENS FOR ALL FIXTURES SHALL BE CONFIRMED BY THE CONTRACTOR WITH THE ROOM FINISH SCHEDULE AND REFLECTED CEILING PLANS, INCLUDING GRID TYPES, ON THE ARCHITECTURAL DRAWINGS PRIOR TO BIDDING. FIXTURES SHALL BE SUBMITTED ACCORDING TO THE CONDITIONS INDICATED ON THE ARCHITECTURAL PLANS. REFER TO THE WRITTEN SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
3 REFER TO THE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS NOT INDICATED IN THE LIGHTING FIXTURE SCHEDULE. WHERE THERE IS AN INCONSISTENCY BETWEEN THE LIGHTING FIXTURE SCHEDULE AND THE SPECIFICATIONS, THE GREATER QUANTITY OR HIGHER QUALITY OF WORK SHALL BE INCLUDED IN THE PROPOSAL.
4 THE LIGHT FIXTURES SCHEDULED ARE THE BASIS OF DESIGN. IT IS NOT INTENDED TO LIMIT COMPETITION FROM EQUAL MANUFACTURERS. ALL BIDDERS SHALL SUBMIT THEIR PROPOSED LIGHT FIXTURES IN SUBMITTAL FORM A MINIMUM OF 10 BUSINESS DAYS PRIOR TO BID DATE FOR REVIEW. APPROVED LIGHT FIXTURES WILL BE ISSUED IN AN ADDENDUM.
5 THE CONTRACTOR SHALL PROVIDE ALL HARDWARE AND ACCESSORIES AS REQUIRED TO INSTALL FIXTURES IN LOCATIONS AS ILLUSTRATED WITH MOUNTING METHODS DESIRED.
6 WHEN A UNIVERSAL (120-277V) VOLTAGE OPTION IS AVAILABLE, IT SHALL BE PROVIDED. OTHERWISE PROVIDE AS INDICATED IN SCHEDULE.
7 FOR ALL SUSPENDED FIXTURES, COORDINATE THE EXACT MOUNTING ELEVATION ABOVE FINISHED FLOOR WITH ARCHITECT PRIOR TO INSTALLATION. PROVIDE SUSPENSION HARDWARE IN LENGTHS AS REQUIRED.

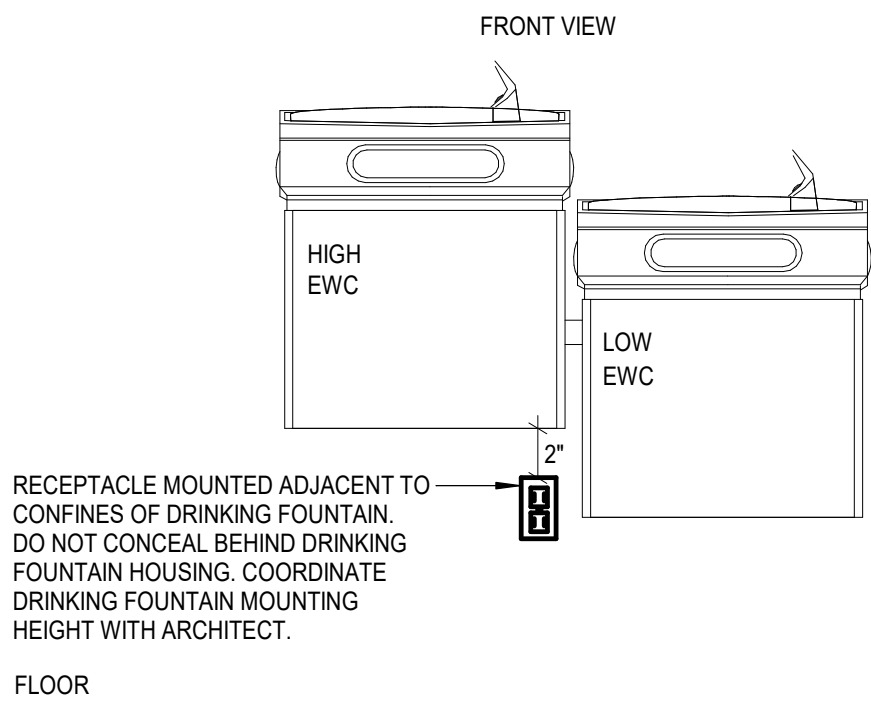


DRINKING FOUNTAIN WITH GFCI RECEPTACLE
Scale: NOT TO SCALE

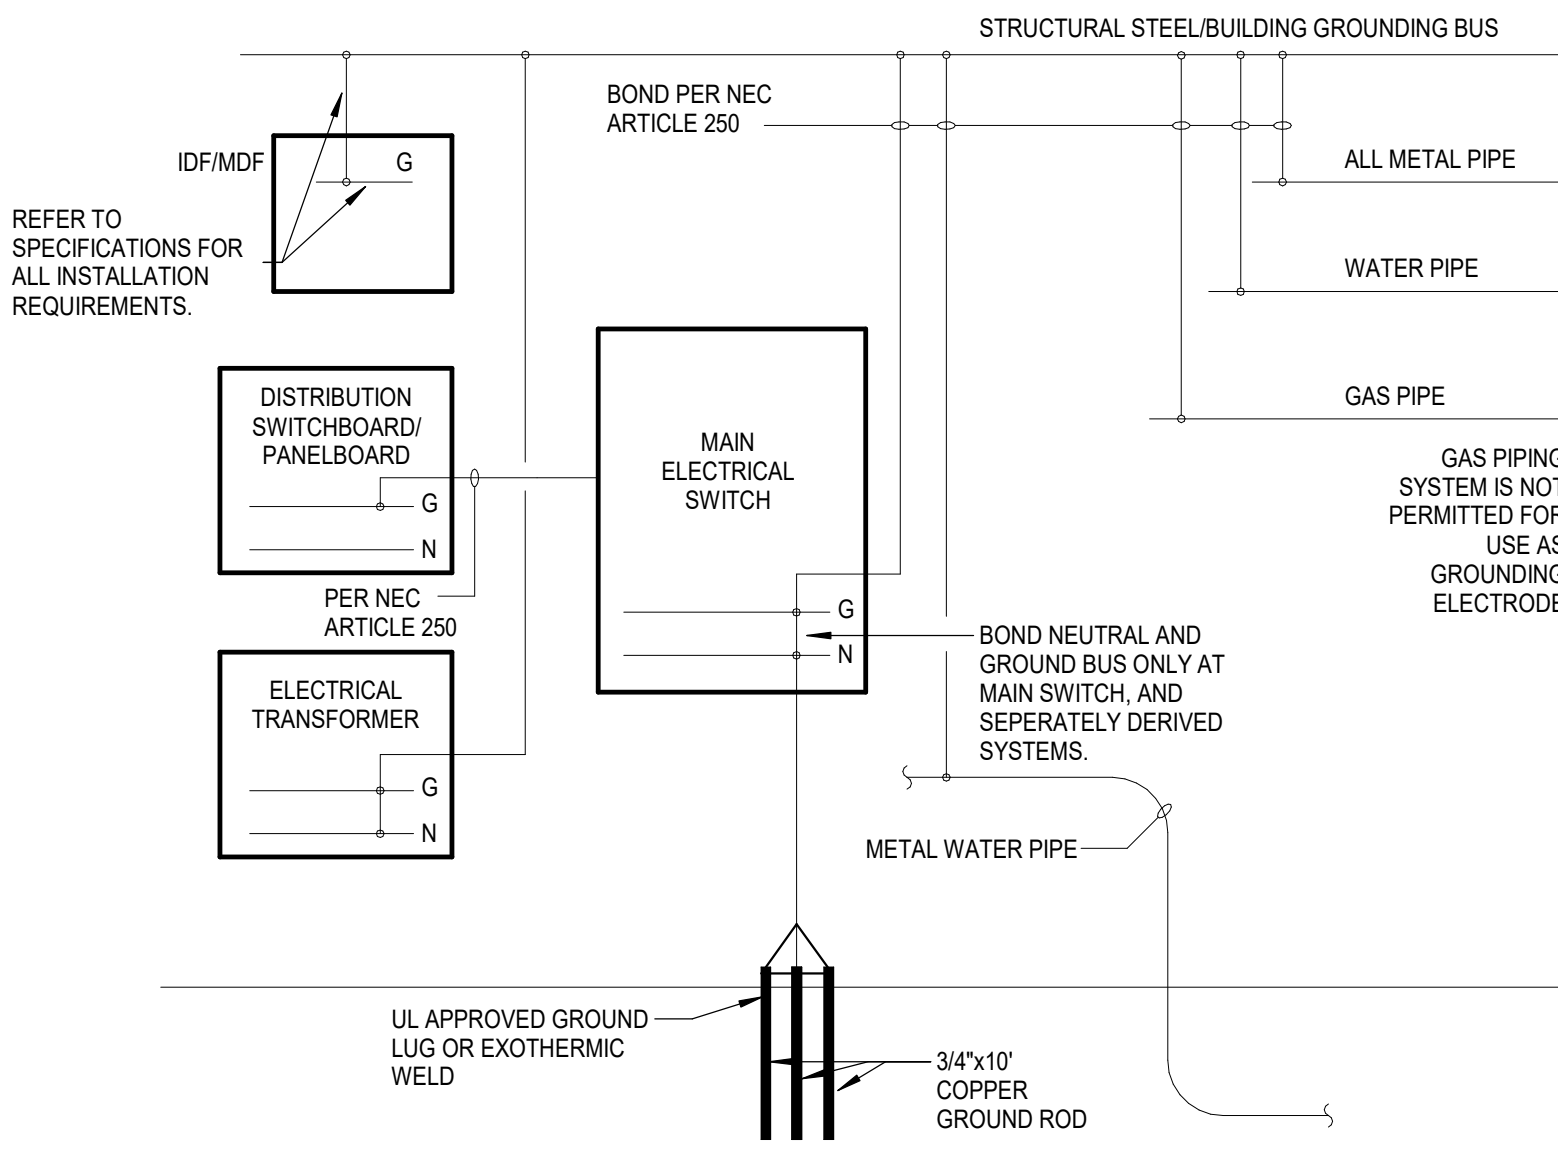

SYSTEM GROUNDING
Scale: NOT TO SCALE

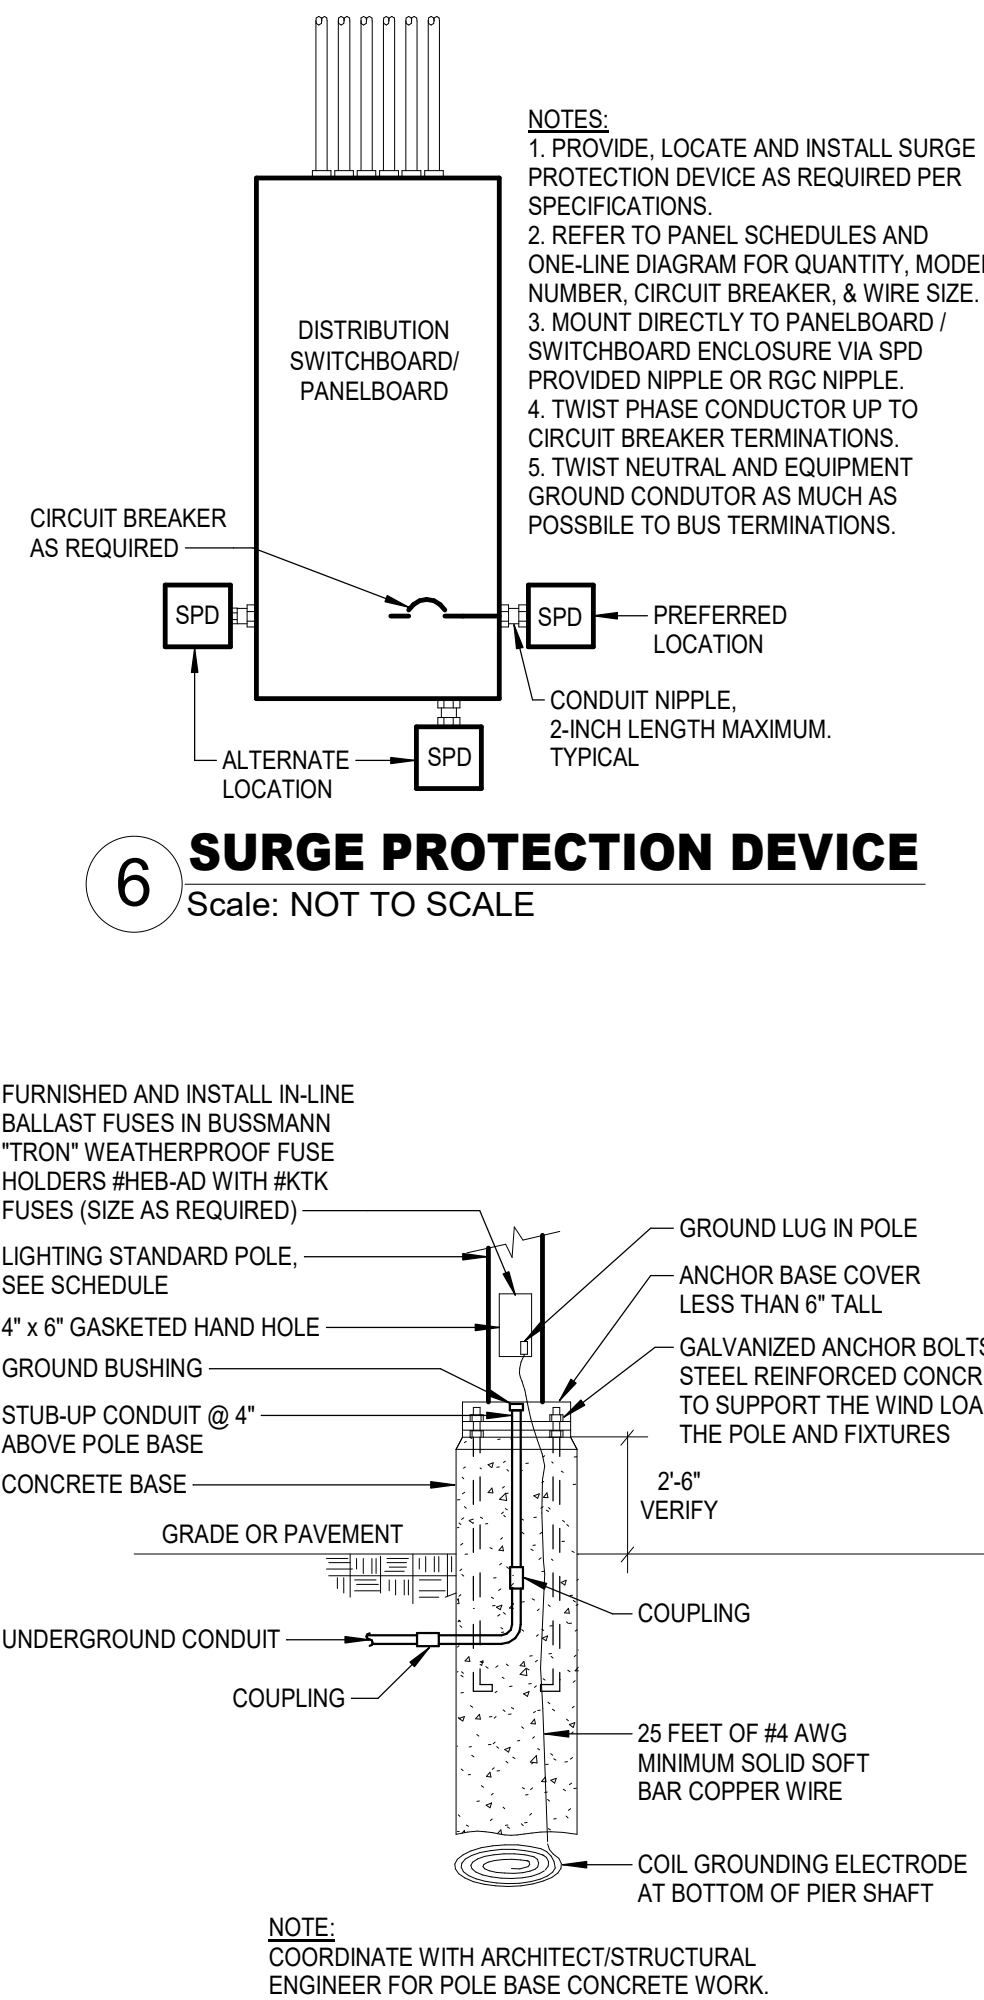


SURGE PROTECTION DEVICE
Scale: NOT TO SCALE

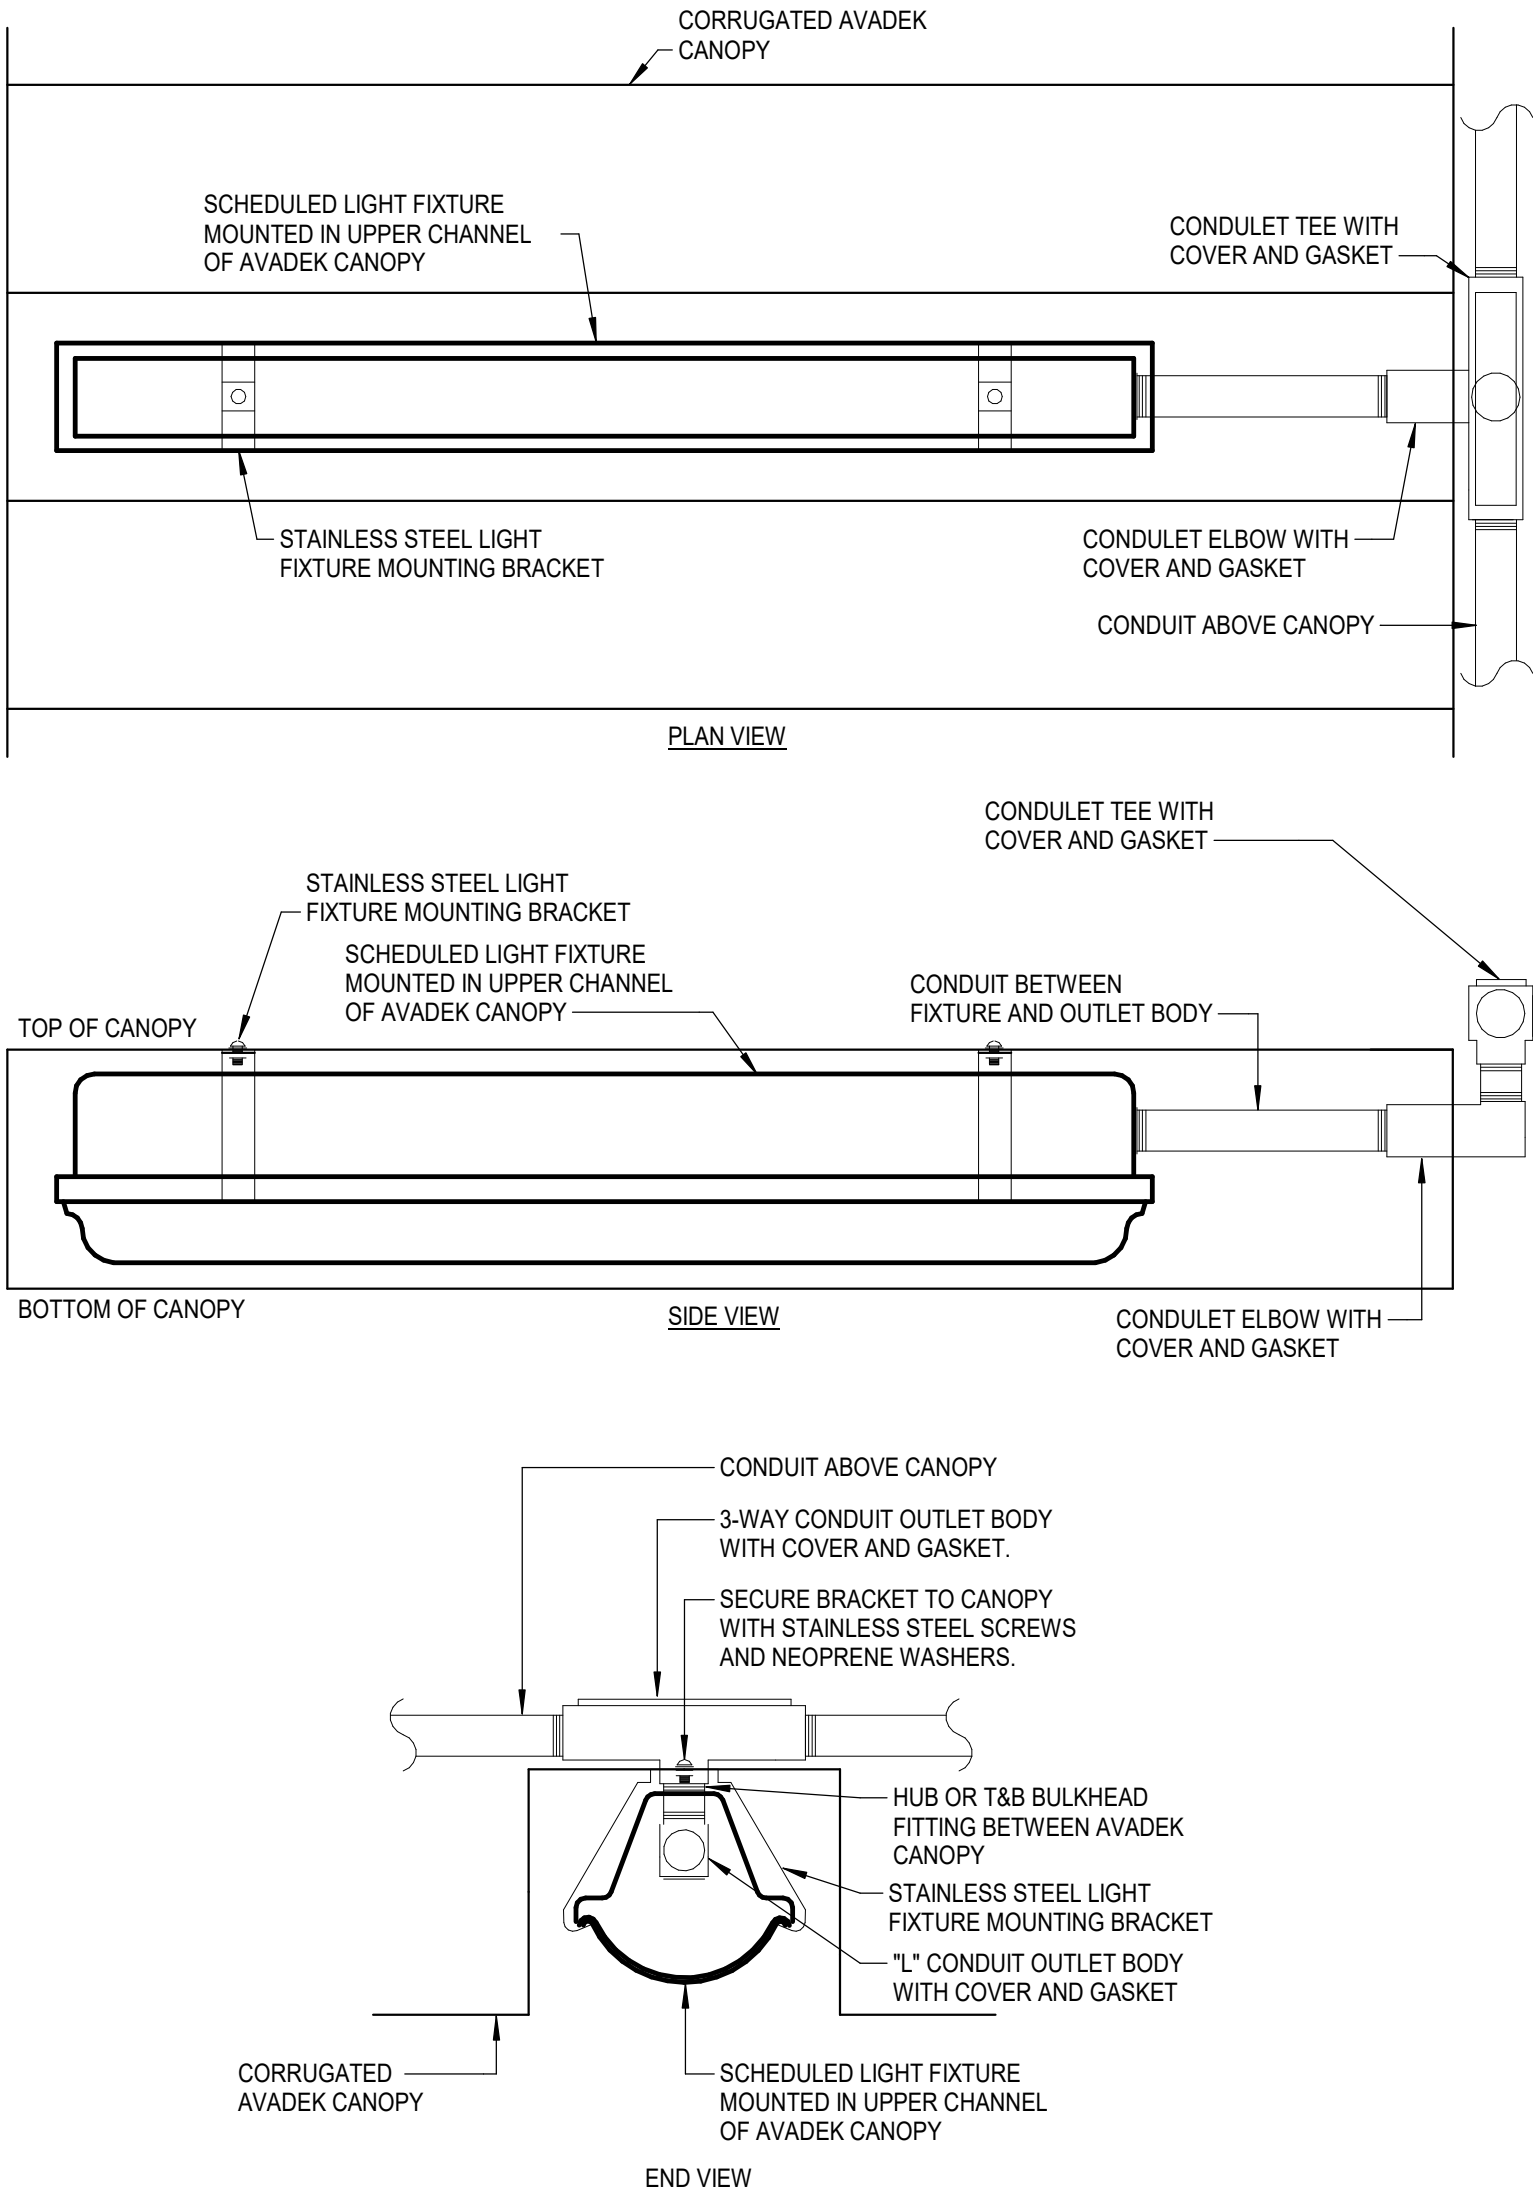

AVADEK LIGHT FIXTURE MOUNTING
Scale: NOT TO SCALE

ELECTRICAL REQUIREMENTS AT POLE BASE
Scale: NOT TO SCALE

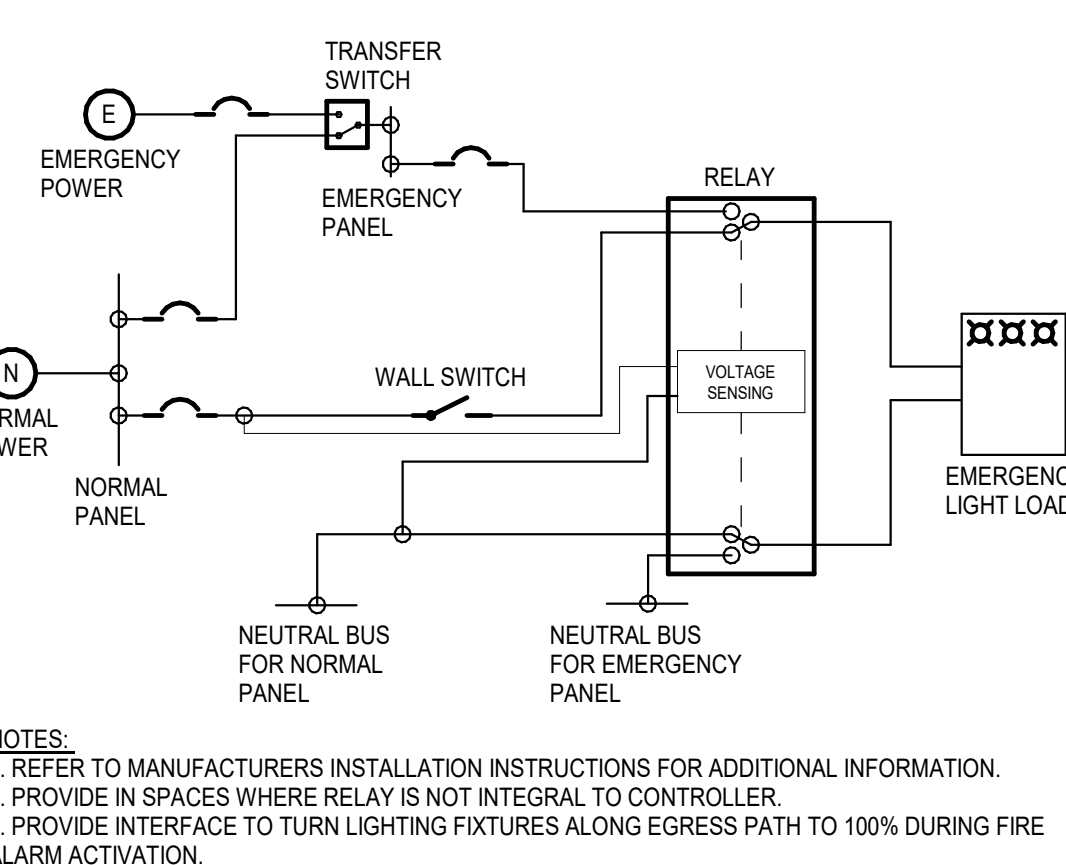

EMERGENCY LIGHTING LOAD CONTROL RELAY
Scale: NOT TO SCALE

SYMBOL SCHEDULE

SYMBOL	DESCRIPTION (DISREGARD ITEMS NOT SHOWN ON PLANS)
LIGHTING (LETTER DENOTES TYPE - SEE LIGHT FIXTURE SCHEDULE)	
○	LIGHT FIXTURE
○	DOWNLIGHT FIXTURE
□	LIGHT FIXTURE - WALL MOUNTED
□	FIXTURE ON EMERGENCY CIRCUIT
○	DOWNLIGHT FIXTURE ON EMERGENCY CIRCUIT
□	LIGHT FIXTURE - WALL MOUNTED ON EMERGENCY CIRCUIT
→	EXT LIGHT - UNIVERSAL MOUNTING WITH DIRECTIONAL ARROWS AS REQUIRED
→	EXT LIGHT - WALL MOUNTING WITH DIRECTIONAL ARROWS AS REQUIRED
SWITCHES	
\$	LINE VOLTAGE SINGLE POLE SWITCH
\$2	LINE VOLTAGE 2-POLE SWITCH
\$3	LINE VOLTAGE 3-WAY SWITCH
\$4	LINE VOLTAGE 4-WAY SWITCH
\$K	LINE VOLTAGE KEYSWITCH
\$3K	LINE VOLTAGE KEYSWITCH 3-WAY SWITCH
\$D	LINE VOLTAGE WALL DIMMER SWITCH, SIZE AND TYPE AS REQUIRED
\$VD	LINE VOLTAGE WALL MOUNTED 0-10V DIMMER SWITCH WITH VACANCY SENSOR, MANUAL ON / AUTO OFF
\$V	LINE VOLTAGE WALL MOUNTED SWITCH WITH VACANCY SENSOR, MANUAL ON / AUTO OFF
\$OC	LINE VOLTAGE WALL MOUNTED SWITCH WITH OCCUPANCY SENSOR, AUTO ON / AUTO OFF
\$OD	LINE VOLTAGE WALL MOUNTED 0-10V DIMMER SWITCH WITH OCCUPANCY SENSOR, AUTO ON / AUTO OFF
\$P	LINE VOLTAGE SWITCH WITH PILOT LIGHT
\$MC	MOMENTARY CONTACT SWITCH
□	PUSH BUTTON
\$T	SPRING WOUND MECHANICAL TIME SWITCH, 20 AMP, 12-HOUR NO HOLD, UNLESS NOTED OTHERWISE
\$TH	SPRING WOUND MECHANICAL TIME SWITCH, 20 AMP, 12-HOUR WITH HOLD, UNLESS NOTED OTHERWISE
LIGHTING CONTROLS	
\$L	LINE VOLTAGE LIGHTING CONTROLLER WALL SWITCH
\$R	LOW VOLTAGE LIGHTING CONTROLLER WALL SWITCH
\$B	LOCAL BMCS LIGHTING OVERRIDE SWITCH
◇	CEILING MOUNTED PHOTO SENSOR, HB= HIGH-BAY SENSOR
◇	CEILING MOUNTED VACANCY SENSOR, MANUAL ON / AUTO OFF, HB= HIGH-BAY SENSOR
◇	CEILING MOUNTED OCCUPANCY SENSOR, AUTO ON TO 100% / AUTO OFF, HB= HIGH-BAY SENSOR
[RX]	LIGHTING CONTROLLER, X= DENOTES CONTROL SEQUENCE, REFER TO CONTROL SCHEDULE
[ER]	LISTED UL924, EMERGENCY LOAD CONTROL RELAY, 0-10V DIMMING COMPATIBLE
[ES]	LISTED UL1008 EMERGENCY TRANSFER SWITCH, 0-10V DIMMING COMPATIBLE
RECEPTACLES AND OUTLETS	
○	SIMPLEX RECEPTACLE
○	DUPLEX RECEPTACLE
○	POWER POLE
○	125/250 VOLT, 1 PHASE, 3-WIRE, 20 AMPS, UNLESS NOTED OTHERWISE
○	DOUBLE DUPLEX IN 2-GANG BOX WITH SINGLE COVER PLATE
○	DOUBLE DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE IN 2-GANG BOX WITH SINGLE COVER PLATE
○	DUPLEX GROUND FAULT CIRCUIT INTERRUPTER RECEPTACLE
○	CONCEALED SERVICE FLOOR BOX, DUPLEX RECEPTACLE OUTLET
○	CONCEALED SERVICE FLOOR BOX, DOUBLE DUPLEX RECEPTACLE OUTLET
○	CONCEALED SERVICE MULTI-ACCESS FLOOR BOX WITH WIRING DEVICES AS INDICATED ON DRAWINGS. SIZE TO MATCH DEVICE QUANTITIES
MISCELLANEOUS EQUIPMENT	
[FACP]	FIRE ALARM CONTROL PANEL
[ANNC]	FIRE ALARM REMOTE ANNUNCIATOR
[T]	TRANSFORMER FOR DOOR BELL BUZZER
[CHIME]	CHIME/BUZZER
[G]	REMOTE BLANK FACE GFCI DEVICE
MOTOR CONTROLLERS AND EQUIPMENT	
○	MOTOR, MAKE FINAL MOTOR CONNECTION
○	DISCONNECT SWITCH AS REQUIRED
○	COMBINATION MOTOR STARTER/DISCONNECT SWITCH AS REQUIRED
○	MOTOR STARTER AS REQUIRED
○	PREWIRED DEVICE, MAKE ELECTRICAL FINAL CONNECTIONS
○	VARIABLE FREQUENCY DRIVE MOTOR CONTROLLER FURNISHED BY DIVISION 23, INSTALLED BY DIVISION 26
ELECTRICAL EQUIPMENT	
○	ELECTRICAL DISTRIBUTION OR PANELBOARD
○	DRY TYPE TRANSFORMER
CIRCUITING	
---	CONDUIT
---	CONDUIT BELOW FLOOR, SLAB, OR GRADE
---	3/4", UNLESS OTHERWISE NOTED, LONG HATCH, NEUTRAL; SHORT HATCH, PHASE; "Z" HATCH OR HOOK, GROUND. ARROW INDICATES HOMERUN
SUBSCRIPTS AND ABBREVIATIONS	
WP	INDICATES WEATHERPROOF
WG	INDICATES WIREGUARD
H	INDICATES HORIZONTAL
TL	INDICATES TWIST LOCK
NL	INDICATES NIGHT LIGHT CIRCUIT
(E)	INDICATES EXISTING TO REMAIN
REP	INDICATES REPLACE EXISTING WITH NEW
1L	REFER TO ONE-LINE DIAGRAM
+	INDICATES WALL MOUNTED DEVICE
U	INDICATES TO PROVIDE COMBINATION USB/RECEPTACLE DEVICE
SR	SWITCH CONTROLLED RECEPTACLE. RECEPTACLE SHALL BE PERMANENTLY FACTORY MARKED AS CONTROLLED.
SPDX	X = L LOW EXPOSURE SPD, X = M MEDIUM EXPOSURE SPD, X = H HIGH EXPOSURE SPD, X = SE VERY HIGH EXPOSURE SPD
•	NEXT TO ANY SYMBOL, INDICATES FINAL ROUGH-IN FIELD COORDINATION BY CONTRACTOR WITH ARCHITECTURAL MILLWORK DRAWINGS AND OTHER TRADES
GENERAL NOTES:	
	ALL EXTERIOR BUILDING ELECTRICAL EQUIPMENT TO BE WEATHERPROOF NEMA-4X MINIMUM.